

S-01 series

Snap-in rocker switches

Distinctive features and specifications

ELECTRICAL AND GENERAL SPECIFICATIONS

- Safety certification&Rating:10A125VAC 6A250VAC
- Mechanical life: 30000
- Electrical life: 10000
- Contact Resistance: $<50\text{M}\Omega$
- Insulation Resistance: $>1000\text{M}\Omega$
- Withstand Voltage: $>1500\text{V/minutes}$
- Ambient Temperature: $-10^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Storage Temperature: $-10^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Ambient Humidity: Max.85%
- Operating Force: 3~8N 【depend on switch function】

MATERIALS

- Base: PA66.
- Button:PA66/ PC
- Contact:compound silver
- Terminal:brass(tin plated)
- Terminal Exotherm: Max 30°C
- Terminal Solderability: below 350°C , and nomorethan 3seconds. 【don't put pressure in terminal when weld by hand】

APPROVALS

TUV
CE
ROHS
ISO9001




Availability:consultfactory for details or approved models.
Marking:to order switches marked with above approvals,
complete last box of ordering format



ABOUT THIS SERIES

Dimensions: dimensions are in mm.

Packaging unit: 50pieces.

S-01 series
Snap-in rocker switches

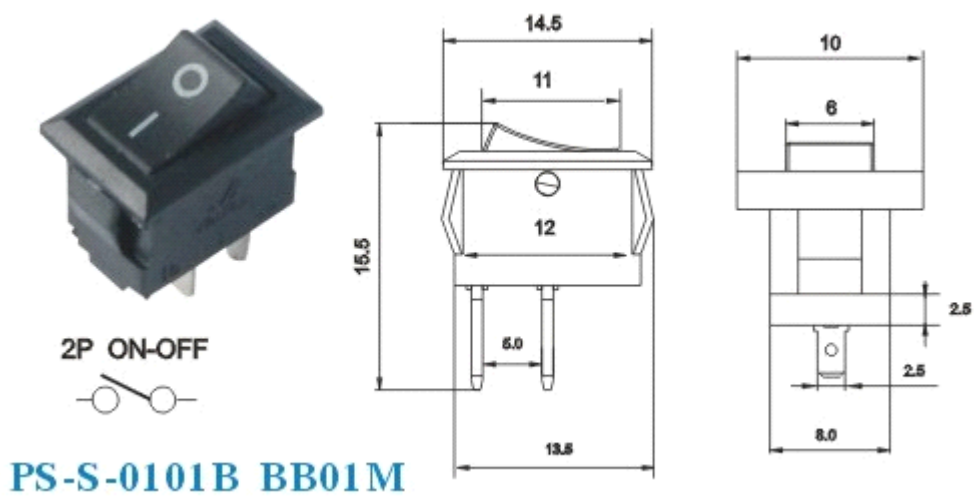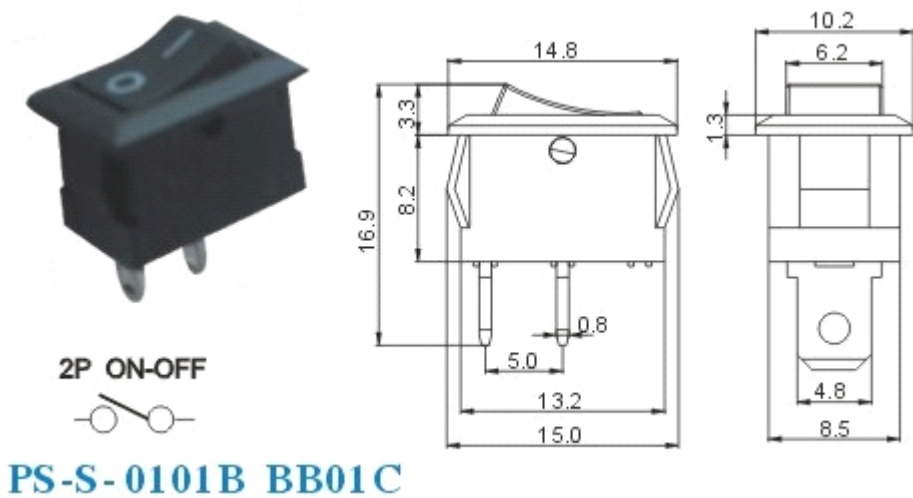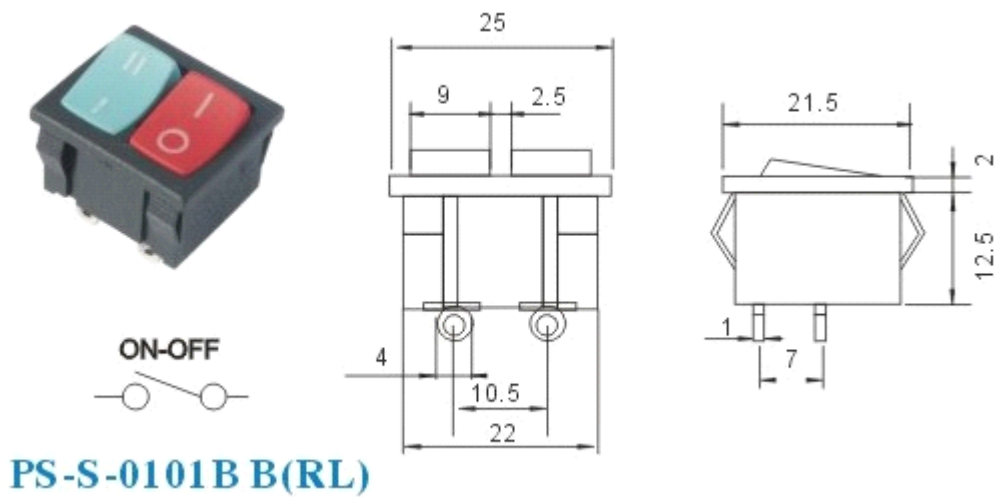

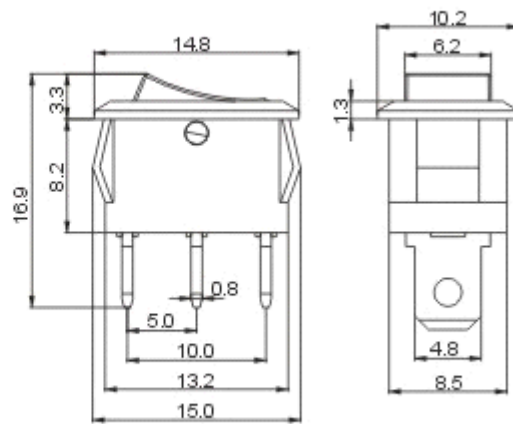

PS-S-0102B BR01C

Rocker Switch Specification Description

例 (Instantiate):

PS-S	01	01	A	B	B	01	A	01
系列号 Series	外形类型 Base Type	开关功能 Function	带灯状况 Luminated	基座颜色 Base Colour	按钮颜色 Actuator Colour	开关标记 Marking	端子规格 Terminal Type	按钮类型 Actuator Type
01 11 21	02 12 22	01 ON-OFF 单档	A 220V氖灯 220V Neon Lamp	B 黑色 Black	B 黑色 Black	01 o -	01	01
02 12 22	03 13 23	02 ON-ON 双档	B 不带灯 No luminated	E 绿色 Green	E 绿色 Green	02 I o II	02	02
03 13 23	04 14 24	03 ON-OFF-ON 三档	C 发光二极管 LED	R 红色 Red	R 红色 Red	03 .	03	03
04 14 24	05 15 25	04 (ON)-OFF 单档单边复位		O 橙色 Orange	O 橙色 Orange	04 手动 常开 常闭	04	04
05 15 25	06 16 26	05 (ON)-OFF 单档单边复位		W 白色 White	W 白色 White	05 OFF 常开 常闭	05	05
06 16 26	07 17 27	06 ON-(ON) 双档单边复位		Y 蛋黄色 Vitellus	Y 蛋黄色 Vitellus	06 OFF NO	06	06
07 17 27	08 18 28	07 (ON)-OFF-ON 三档单边复位		U 蓝色 Blue	U 蓝色 Blue	07 常开 常闭 常开常闭	07	07
08 18 28	09 19 29	08 (ON)-OFF-(ON) 三档双边复位		I 米色 Beige	I 米色 Beige	08 常开 常闭 常开常闭	08	08
09 19 29	10 20 30			L 浅兰色 Light Blue	L 浅兰色 Light Blue	09 常开 常闭 常开常闭	09	09
				W 白色 White	W 白色 White	10 常开 常闭 常开常闭	10	10
				Y 蛋黄色 Vitellus	Y 蛋黄色 Vitellus	11 常开 常闭 常开常闭	11	11
				I 米色 Beige	I 米色 Beige	12 常开 常闭 常开常闭	12	12
				L 浅兰色 Light Blue	L 浅兰色 Light Blue	13 常开 常闭 常开常闭	13	13
				N 棕色 Brown	N 棕色 Brown	14 常开 常闭 常开常闭	14	14
						15 常开 常闭 常开常闭	15	15
						16 常开 常闭 常开常闭	16	16
						17 常开 常闭 常开常闭	17	17
						18 常开 常闭 常开常闭	18	18
						19 常开 常闭 常开常闭	19	19
						20 常开 常闭 常开常闭	20	20
						21 常开 常闭 常开常闭	21	21
						22 常开 常闭 常开常闭	22	22
						23 常开 常闭 常开常闭	23	23
						24 常开 常闭 常开常闭	24	24
						25 常开 常闭 常开常闭	25	25
						26 常开 常闭 常开常闭	26	26
						27 常开 常闭 常开常闭	27	27
						28 常开 常闭 常开常闭	28	28
						29 常开 常闭 常开常闭	29	29
						30 常开 常闭 常开常闭	30	30
						31 常开 常闭 常开常闭	31	31
						32 常开 常闭 常开常闭	32	32
						33 常开 常闭 常开常闭	33	33
						34 常开 常闭 常开常闭	34	34
						35 常开 常闭 常开常闭	35	35
						36 常开 常闭 常开常闭	36	36