

S-04 series

Snap-in rocker switches

Distinctive features and specifications

ELECTRICAL AND GENERAL SPECIFICATIONS

- Safety certification&Rating:10A125VAC 6A250VAC
- Mechanical life: 30000
- Electrical life: 10000
- Contact Resistance: $<50\text{M}\Omega$
- Insulation Resistance: $>1000\text{M}\Omega$
- Withstand Voltage: $>1500\text{V/minutes}$
- Ambient Temperature: $-10^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Storage Temperature: $-10^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- Ambient Humidity: Max.85%
- Operating Force: 3~8N 【depend on switch function】

MATERIALS

- Base: PA66.
- Button:PA66/ PC
- Contact:compound silver
- Terminal:brass(tin plated)
- Terminal Exotherm: Max 30°C
- Terminal Solderability: below 350°C , and nomorethan 3seconds. 【don't put pressure in terminal when weld by hand】

APPROVALS

TUV
CE
ROHS
ISO9001

Availability:consultfactory for details or approved models.
Marking:to order switches marked with above approvals,
complete last box of ordering format

ABOUT THIS SERIE


Dimensions: dimensionsarein mm.

Packagingunit: 50pieces.

S-04 series
Snap-in rocker switches



PS-S-0401B BR01

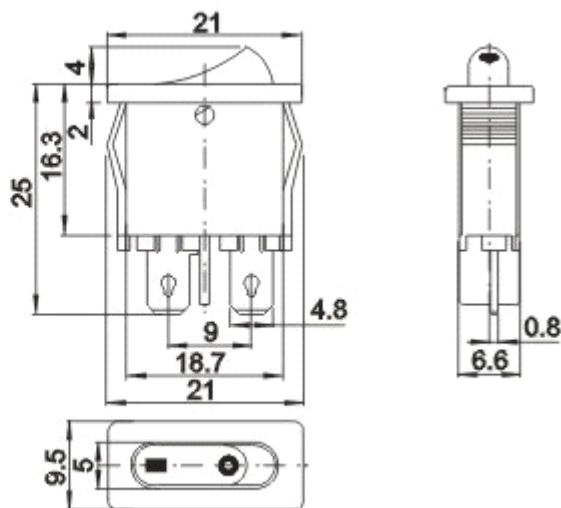

Rocker Switch Specification Description

(Instantiate) :

PS-S	01	01	A	B	B	01	A	01
系列号 Series	外形类型 Base Type	开关功能 Function	带灯状况 Lumina ted	底座颜色 Base Colour	按钮颜色 Actuator Colour	开关标记 Marking	端子规格 Terminal Type	按钮类型 Actuator Type
01 11 21	01 11 21	01 ON-OFF 单档	A 220V 氖灯 220V Neon Lamp	B 黑色 Black	B 黑色 Black	01 o -	01 4.8X0.8	01 7.8
02 12 22	02 12 22	02 ON-ON 双档	B 不带灯 No luminated	G 灰色 Grey	E 绿色 Green	02 I o II	B 4.8X0.8	02 3.8
03 13 23	03 13 23	03 ON-OFF-ON 三档	C 发光二极管 LED	E 绿色 Green	R 红色 Red	03 .	C 3X0.8	03 4.9
04 14 24	04 14 24	04 (ON)-OFF 单档单边复位		U 蓝色 Blue	O 橙色 Orange	04 手动 停 自动	D PC	04 7.8
05 15 25	05 15 25	05 ON-(OFF) 单档单边复位		W 白色 White	W 白色 White	05 开 关 开 关	E PC	05 7.8
06 16 26	06 16 26	06 ON-(ON) 双档单边复位		Y 蛋黄色 Vitellus	Y 蛋黄色 Vitellus	06 开 关 开 关	F 6.3X0.8	06 10
07 17 27	07 17 27	07 (ON)-OFF-ON 三档单边复位		I 米色 Beige	I 米色 Beige	07 开 关 开 关	G 6.3X0.8	07 7
08 18 28	08 18 28	08 (ON)-OFF-(ON) 三档双边复位		L 浅兰色 Light Blue	L 浅兰色 Light Blue	08 开 关 开 关	H 6X0.8	08 5.1
09 19 29	09 19 29			N 棕色 Brown	N 棕色 Brown	09 OFF ON	I 3.8X0.8	09 6.3
10 20 30	10 20 30					10 开 关 开 关	J 2.7x0.5	10 5.0
						11 开 关 开 关	K 6.3x0.8	11 10.5
						12 开 关 开 关	L	
						13 开 关 开 关		
						14 开 关 开 关		
						15 开 关 开 关		
						16 开 关 开 关		
						17 开 关 开 关		
						18 开 关 开 关		
						19 开 关 开 关		
						20 开 关 开 关		
						21 开 关 开 关		
						22 开 关 开 关		
						23 开 关 开 关		
						24 开 关 开 关		
						25 开 关 开 关		
						26 开 关 开 关		
						27 开 关 开 关		
						28 开 关 开 关		
						29 开 关 开 关		
						30 开 关 开 关		
						31 开 关 开 关		
						32 开 关 开 关		
						33 开 关 开 关		
						34 开 关 开 关		
						35 开 关 开 关		
						36 开 关 开 关		